

PROJECT NAME: _____
ITEM NUMBER: _____
QUANTITY: _____
LENGTH: _____

AURA

AURA SUPPORT

- ☐ 1/2" Clear Tempered Glass

GLASS:

- ☐ 1/2" Glass - 72" Max. Span
Contact factory for spans exceeding max.

MOUNTING OPTIONS:

Some mounting options may not be available on some cantilevered/counter substrate combinations. Refer to mounting cut-sheet or contact factory for additional information.

- ☐ 640-Z Above counter Surface Mount (Standard)



Glass to metal connections shall be buffered to ensure no metal to glass contact.

ELECTRICAL COMPONENTS:

LIGHTS ONLY

- ☐ Ultra-Slim™ LED Display Light 4000k (Std.)
Ideal over refrigerated product areas



HEAT STRIP ONLY

- ☐ Hatco GRNM Narrow Max Watt Heat Lamp (Std.)
(Other Hatco heat strips available)

HEAT/LIGHT COMBO

- ☐ Hatco GRNM Narrow Max Watt Heat Lamp and
Ultra-slim™ LED Lights 4000k(Std.)(with external driver)
(other Hatco heat/combo units available)

Heat Lamps and LED lights contained in stainless steel housing;
Wire chase using 1" sq tubing unless otherwise specified

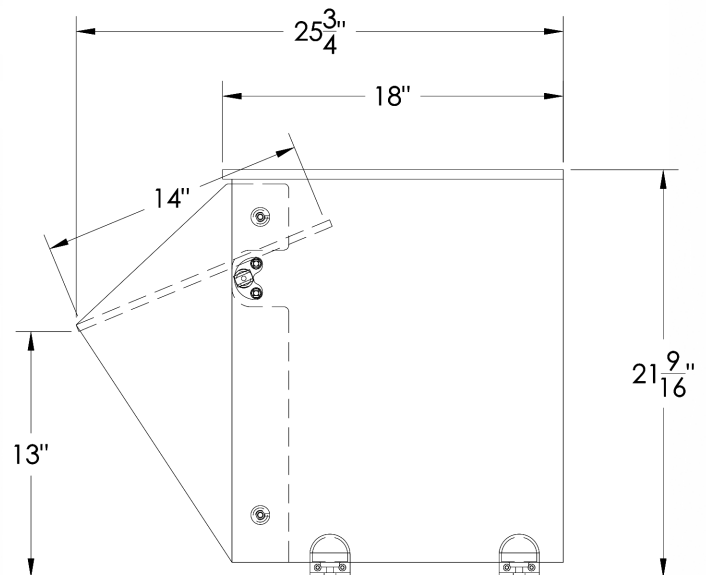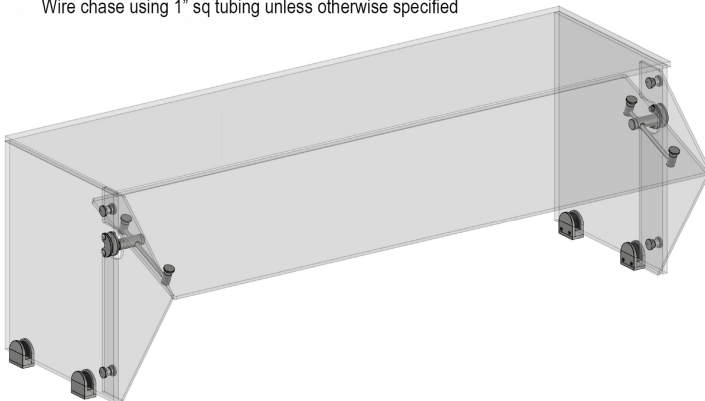

Specifications for reference only and may be changed without notice. All orders require approved shop drawings prior to release to production.
Products are drawn and built to customer specification. It is the responsibility of the customer to ensure product meets local health board standards.